

9. Follow steps 5, 6 and 7, for adjustment of bottom carburetor.

10. Go back to the top and bottom carburetors, recheck each setting for correctness.

Idle Speed Adjustment.

1. Adjust idle speed screw on towershaft until engine idles at approximately 750 RPM in gear.

Choke Shutter Adjustment

1. Remove carburetor cover (115 and 140 H.P.). Figure 11.

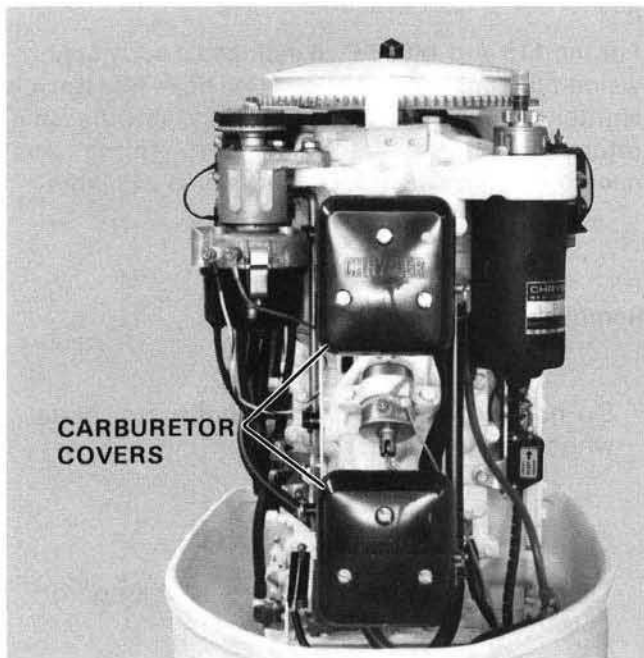


Figure 11. Removing Carburetor Cover.

2. Loosen screws on choke swivels to free choke link. Figure 13.

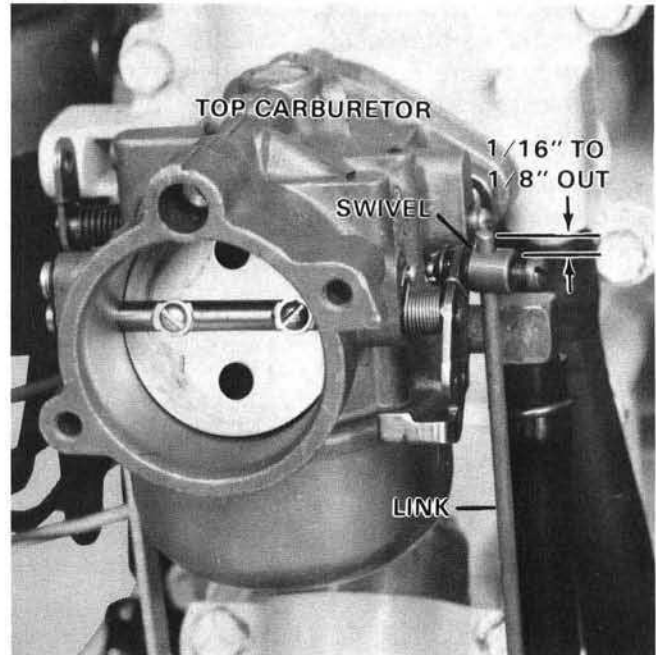


Figure 12. Positioning Choke Link.

3. Position top end of link approximately 1/16 to 1/8 inch through top carburetor choke swivel. Figure 12. Tighten screws to secure link in swivels. Figure 13.

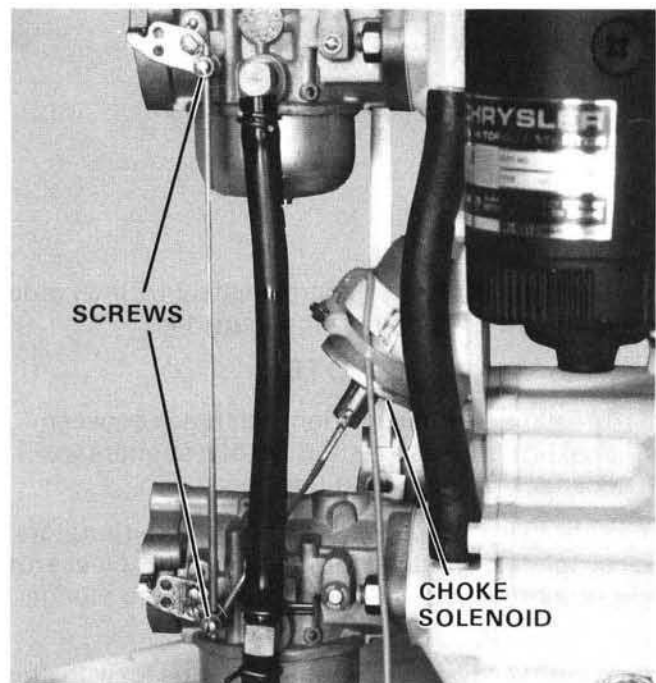


Figure 13. Securing Choke Link.